

WINEMASTER

FRENCH MANUFACTURER OF WINE CELLAR AIR CONDITIONERS

EFFICIENCY AND LOW CONSUMPTION

Designed for spaces up to 100 cubic meters in volume, WineMaster SP100 air conditioners are exceptionally high-efficiency and allow for significant energy savings.

WINE CELLAR AIR CONDITIONER



100 m³

Air-conditioning up to 100 m³



High performance integrated thermostat



Quiet



Respectful of the environment



Ideal climate conditions for the preservation of your wine



NEW
Connectable device
(function with subscription)

WINE SP100

/ 4 / 8 METERS
/ PRO

THE SPLIT UNITS







WINESP100

- Keeps cellars at a constant temperature between 8 and 18 °C*
- Humidity control: excess humidity is condensed and evacuated outside
- Rubber shock absorbers are incorporated, creating an anti-vibration system
- Reheating feature
- Easy upkeep: just a filter that needs to be changed once a year
- Digital display electronic thermostat
- Reaction turbines for well-controlled consumption
- 2-year warranty

OUTSIDE UNIT

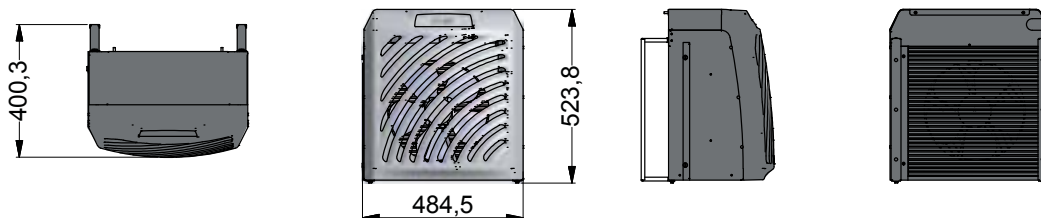

INSIDE UNIT

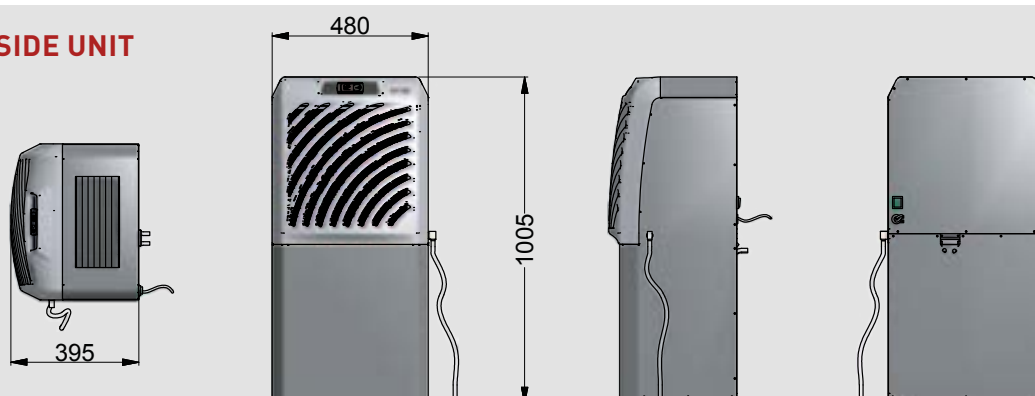




EASY TO INSTALL

Ready to be installed, the Wine SP100 has a simple and quick plug-in system with two useful line lengths for connecting the outside and inside units: ■ SP100-4: 4 m ■ SP100-8: 8 m.

■ **Important** : The SP100 PRO model must be installed by a professional.

The outside unit, which is very quiet, can thus be moved further away from the inside unit, and set up outside the house; an ideal solution if the cellar is underground or if it is directly adjacent to the living space.

THE SPLIT UNITS WINEMASTER®

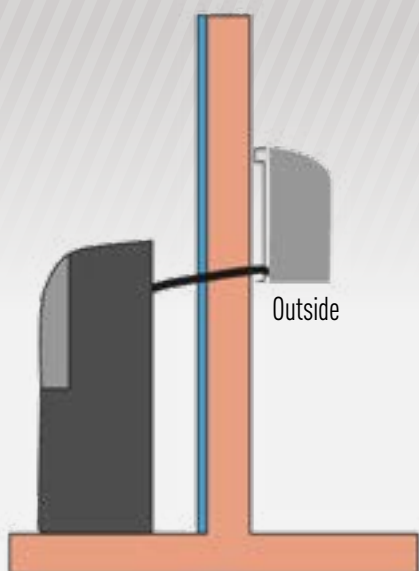

	PRELOADED WITH FLUID	
REFERENCE	SP100-4 SP100-8	SP100 PRO
Electrical supply	230-240 V - 50Hz	230-240 V - 50Hz
Air conditioning capacity*	Up to 100 m ³ *	Up to 100 m ³ *
Indoor unit dimensions	W.480 x H.1005 x D.395 mm	W.480 x H.1005 x D.395 mm
Outdoor unit dimensions	W.485 x H.524 x D.400 mm	W.485 x H.524 x D.400 mm
Indoor unit weight	54 Kg	54 Kg
Outdoor unit weight	16 Kg	16 Kg
Cooling capacity	2500 W at 12 °C	2500 W at 12 °C
Electrical power absorbed	1250 W	1250 W
Sound level in the cellar (at 1m and 3m)	53 dB / 50 dB	53 dB / 50 dB
Cellar airflow rate (cold side)	500 m ³ /h	500 m ³ /h
Outside airflow rate (hot side)	750 m ³ /h	750 m ³ /h
Coolant	R513A Preloaded device	R513A Fluid not supplied
Heat resistance	1000 W	1000 W
Temperature regulation*	Preset to 12 °C adjustable between 8 and 18 °C*	Preset to 12 °C adjustable between 8 and 18 °C*
Max. outside temperature**	35°C	35°C
Line Lengths for connecting	4,5 or 8 meters	Max. 15 meters

* With right insulation and adapted to the volume of the cellar.

** The power could be reduced in function of outside temperature, its why the device may lose capacity to keep the cellar at 12 °C if the outside temperature gets close to 35 °C.

WINEMASTER CONNECT,

OPTION

Just one box and your wine cellar is connected!



Optimal wine
conservation



Remote
supervision



Statistics
in real time



Failure alerts

With WineMaster Connect, you can remotely control the settings and ensure the proper functioning of your air conditioner. Simply connect our connected box to your air conditioner and connect it to your Internet box via an Ethernet connection to monitor or modify the main operating parameters in real time.



This device requires a subscription.
Ask your retailer for pricing information.

A STORY OF LOVE AND TERROIR...

It is in the foothills of the Alsatian vineyards, where the wine route starts, that the WineMaster story begins. Our attachment to the terroir and our love of wine have always been the source of our thought process and creativity.

Since its inception in 1984, the skills and know-how of the men and women of WineMaster have been at the heart of every step in the air conditioner manufacturing process.

Quality and detail are what motivate us, and we are proud of our products and their 100% Alsatian design.

“INNOVATION AND EXCELLENCE ARE
WINEMASTER'S KEY VALUES.”

