

Through-The-Wall Cooling Systems



Wine is your passion. Preserving it is ours.

The Through-the-Wall (TTW) wine cellar cooling Unit from Wine Guardian® offers a **contemporary design** that will match the unique style of today's modern wine cellar. This small wine cooling unit is available in two capacities, perfect for **small to mid-sized cellars**. This innovative system offers exceptional airflow and maintains optimal **temperature and humidity** with the **quietest** operation in its class.

Quality, sophistication, and a host of other features that are standard to Wine Guardian®

- Commercial-grade, corrosion resistant components long-term durability
- The only TTW system that displays both temperature and humidity and controls temperature
- Quiet and efficient operation
- EasyMount one-piece wall bracket and support frame included
- Wine Guardian® TTW Systems can directly replace most competitors through-the-wall models. See your distributor for details.

Options

- Hot air discharge and duct adapter kit
- Remote monitoring and sensing
- Alarm and communication capabilities
- [Factory-configured serving temperature option](#) (TTW018/WG25 only)
- Integrated electric heater



TTW unit out of racking



Made in
the U.S.A.

WG25 conforms to China Compulsory Certification (CCC) standards.

Wine Guardian USA:
1 (800) 825 3268 | 1 (315) 452 7400
wineguardian.com | info@wineguardian.com

Wine Guardian European Office:
Pestalozzistrasse 2, CH-8201 Schaffhausen, Switzerland
+41 (0) 52 224-0490 | tluehr@airinnovations.com

Distributor:
COVINI GmbH
Am Neuner 45
A-6890 Lustenau
www.xi-system.com

Through-The-Wall Cooling Systems




Front View in Racking

Additional Standard Features

- Integrated condensate evaporation system
- Drain overflow connection
- Aluminum, corrosion-resistant cooling coil
- Power cord connections on both sides of system to connect power from front or back of unit
- Engineered for ideal airflow, including adjustable louvers for optimal cellar air circulation
- Can be mounted flush with the wall or racking



Front Digital Display

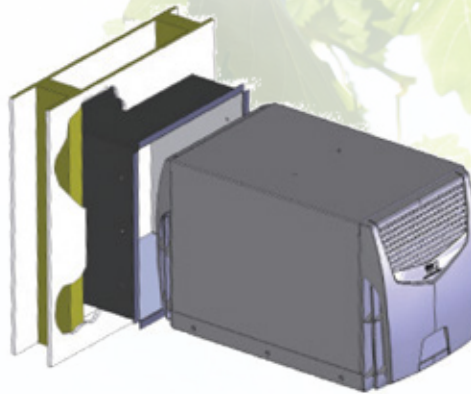

Side view With EasyMount



Back View With Optional Duct Adapter

System Specifications*

Model	Capacity	Length	Width	Height	Electrical	Weight
TTW009**	1,130 BTU/H	25"	14 3/4"	15 7/8"	115v / 1ph / 60Hz	60 lbs
TTW018**	2,100 BTU/H	25"	14 3/4"	15 7/8"	115v / 1ph / 60Hz	62 lbs
WG15**	248 Watts	63.5 cm	36.2 cm	40.1 cm	220 - 240v / single-phase / 50Hz	27 kg.
WG25**	455 Watts	63.5 cm	36.2 cm	40.1 cm	220 - 240v / single-phase / 50Hz	28 kg.

* Designed for 95°F (35°C) max, 50°F (10°C) min condenser inlet. BTU/H values recorded at 75°F and watt values recorded at 27°C.

Sizing note: Many variables affect proper unit sizing, including type of construction, insulation values, amount of glass, residential vs. commercial applications, etc. Proper unit size should only be determined by using the [Wine Guardian cooling calculator](#). Check with your Wine Guardian authorized distributor for more information.

** Direct replacement for most through-the-wall models. Ask your authorized Wine Guardian® distributor for details.

Manufacturer reserves right, without notice, to make changes to specifications at its sole discretion.

US Patent No. D634760 S

Canada Patent No. 135465

Mexico Reg. No. 33191

Rev 7/17

Wine Guardian USA:
1 (800) 825 3268 | 1 (315) 452 7400
wineguardian.com | info@wineguardian.com

Wine Guardian European Office:
Pestalozzistrasse 2, CH-8201 Schaffhausen, Switzerland
+41 (0) 52 224-0490 | tluehr@airinnovations.com

Distributor:
COVINI GmbH
Am Neuner 45
A-6890 Lustenau
www.xi-system.com